



Nothing stands in the way of a Wildebeest!

For outdoor adventure or life in the wilds the Wildebeest is ready.



The fat tires are a smooth ride on rugged terrain and won't bring dust inside.



The outdoor performance comes with an easy, custom fit and exceptional mechanical reliability.

The hourglass frame is rigid for excellent energy transfer and the long wheelbase gives monster truck stability.

Designed by Participant in California 



Accessories

Headrest has vertical, forward and backward, and pivot adjustments. Attaches with knobs to the push handles on the back canes. Includes a ledge for the occipital lobe of the user's head.



These lateral trunk supports bolt on to the back canes. Each pad is adjustable for depth, angle, height and width. The pads have a 4 x 5 array of holes on the back. Each pad includes a washable fabric cover.

The activity tray supports a range of activities like fine motor exercises, eating, and education. The design includes two indentions that are great for objects like a cup, a perimeter rim prevents objects from rolling off. The polypropylene material is food safe and super easy to clean.



Bolt on anti tipper. Adjustable and flip up.

Tubular armrests with quick release attachments to the frame.





Footrest Riser. Bracket and foot plate that lifts the footrest surface by 80 mm.

Wildebeest Measurements

mm (or as noted)

Seat Width	250	300	350	400	450	500
Seat Depth	250, 300, 350	300, 350, 400	350, 400, 450			
Back Height	300, 350, or 400. The Tall Back Kit: 400, 450, and 500.					
Back Angle	7 angle settings from 78 to 126 degrees at 6-degree intervals.					
Front Seat Height	470, 490, 510					
Seat Angle from the Ground	7 degrees					
Footrest Height	280 - 380. Footrest Riser Kit: 140 - 300.					
Wheelbase	530	580	630			
Overall Width	490	540	590	640	690	740
Overall Length	985	1,035	1,080			
Product Weight	12.1 kg	12.8 kg	13.5 kg	14.3 kg	15.7 kg	16.3 kg
Weight Capacity	130 kg					
Center of Gravity Adjustability	Adjustable at 7 settings each 12 mm apart.					
Overall Height	770 mm (Measured with Back Height set at 300 mm, Front seat set at 470 mm)					
Push Handle Height	750 mm (Back height set to 300 mm, Front seat set at 470 mm)					
Rear Wheel Dimensions	600 x 38 mm diameter (24 x 1-3/8 in. 32-540 tire)					
Rear Wheel Camber Angle	4 degrees					
Caster Dimensions	200 mm diameter and 70 mm wide natural rubber tire					
Packaging	One unit per carton; partially assembled; 10 minutes assembly time required.					
Package Size	650 x 700 x 500					
Package Weight	14 kg	15 kg	16 kg	16 kg	18 kg	18 kg
Certifications and Testing	ISO 9001, ISO 13485, CE, Tested ISO 7176 complete, 2X on double drum durability test - 400,000 cycles, ISWP Caster Test - Pass, FWM Wheelchair Test Track - Pass. (see website for all tests and test reports)					

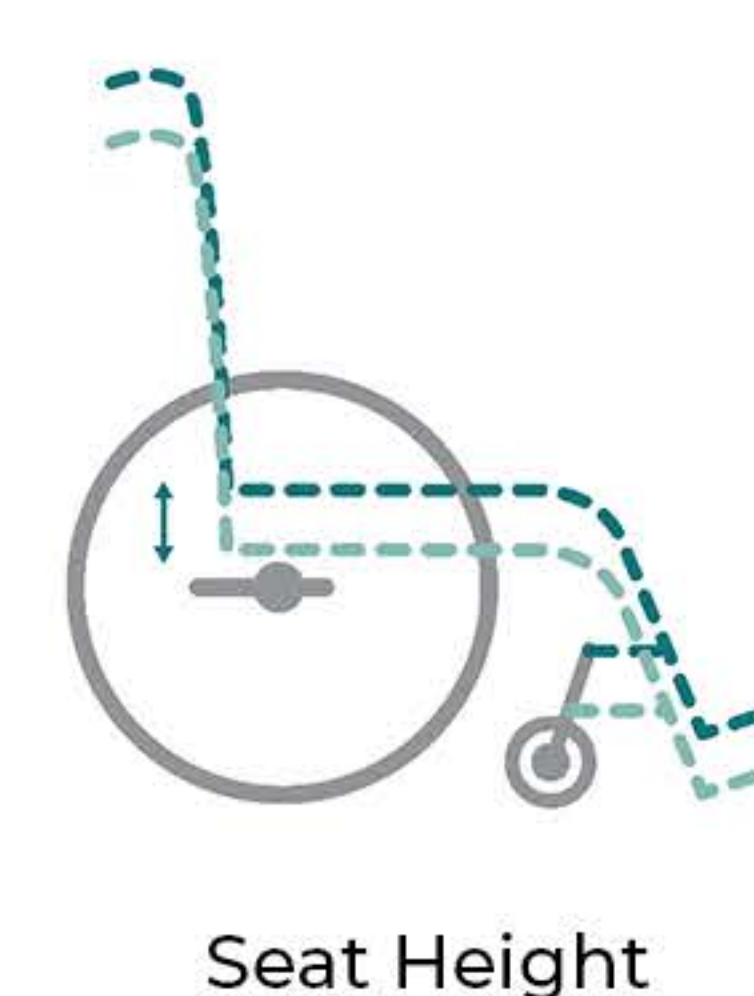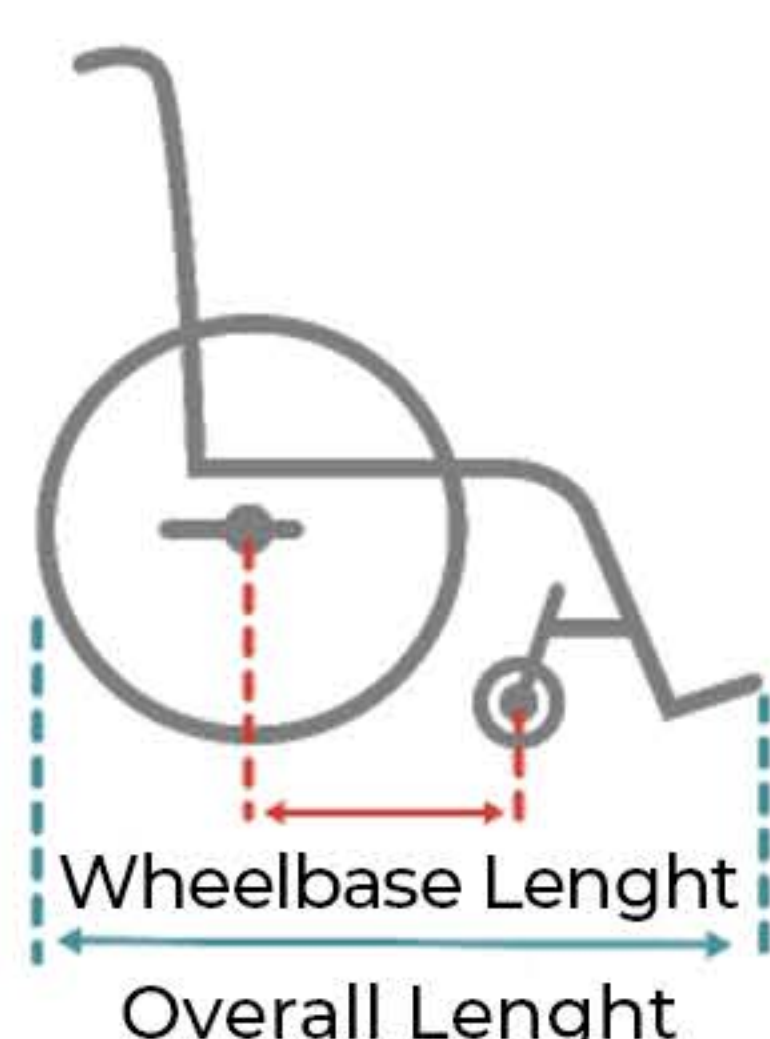

keoke@participant.life | +01 415 218 8278 | Skype: keoke.king

Available August 2021. Pre-orders open June 2021.
 Field demonstrations are available.

Fit Kit

Items included:

- 1 piece hard plastic sheet - 15 x 12 x 1/4" HDPE hard plastic sheet. This can be used to make a seat extension, a mono footplate a wide headrest, to adapt laterals or for other purposes. The plastic is heat gun friendly, is easy to cut with a razor or hack saw, and can be sanded.
- 2 pieces firm foam sheet - 15 x 12 x 1/4" EVA foam. Can be cut and stacked up to make pre-ischial, sacral pad, or other modification.
- 2 tubes of rubber cement - Can be used to permanently glue EVA, HDPE, etc.
- 1 piece of firm foam - 15" x 16" x 2". Polyurethane foam. The density is firmer than the seat cushion. Can be used to make a lift for the seat cushion.
- 1 firm foam wedge, 2" Height x 8" Deep x 15" Wide,
- Hardware - M6 screws, nuts, washers.
- Razor knife.
- 10mm nut driver.

